


NO	REVISION	DATE	CHK.	APP.
△				

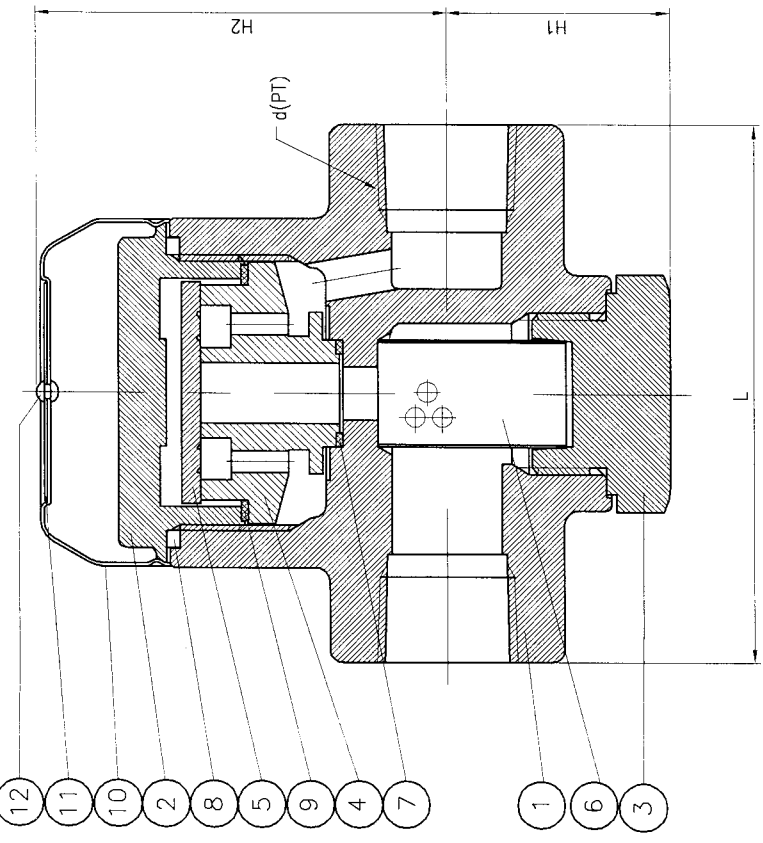

- * SPECIFICATION
1. APPLICABLE FLUID : STEAM
 2. WORKING PRESSURE : **40** kgf/cm²
 3. APPLICABLE TEMPERATURE : **400**°C
 4. HYDRO. TEST PRESSURE : WORKING PRESSURE x 1.5
 5. END CONNECTION : JIS B 0203 PIPE TAPER THREAD
 6. PAINTING : HEAT RESISTANCE SILVER COLOR

12	RIVET	1	AL		
11	NAME PLATE	1	SUS304		
10	INSULATION CAP	1	SUS304		
9	CAP GASKET(LOW)	1	PTFE(C15%)		
8	CAP GASKET(UPP)	1	PTFE(C15%)		
7	SEAT GASKET	1	PTFE(C15%)		
6	SCREEN	1	SUS304		
5	DISC	1	SUS420J2		
4	SEAT	1	SUS410		
3	PLUG	1	SUS304		
2	CAP	1	SCS13		
1	BODY	1	SCS13		

NO.	PART NAME	Q'TY	MATERIAL	REMARK	
				TYPE	MODEL NO.
STEAM TRAP				15A~25A	TDC-4S
TITLE		DISC	DATE	UNIT	SCALE
DWN.		LEE.A.N	2011.06.01	mm	N/S
CHK.		KIM.K.H			YTDC-5S-J01
APP.		KIM.D.H			

* DIMENSIONS

unit : mm

VALVE NO.	SIZE	CHK.	L	H1	H2	d(PT)	WEIGHT(kg)	Q'TY
15A	15A		80.0	34.0	60.0	1/2"	0.5	
20A	20A		80.0	34.0	60.0	3/4"	0.7	
25A	25A		90.0	34.0	63.0	1"	1.2	

YOYOOUN CO., LTD.

A4(210X297)

YOYOOUN CO., LTD.

YYF-D-002/①